

CHECK INN SYSTEMS

KeySafe

VERSION 2.1
Firmware Rev 2H & 3.1



Consulting Professional Engineers Pty Ltd
ABN 43 078 257 315

Check Inn Systems Division

Factory 13, 38 Christensen Street
Cheltenham, Vic 3192
Australia

Phone: +61 3 9555 5444
Fax: +61 3 9555 5445
Email: sales@checkinn.com.au

www.checkinn.com.au




Installation Guide


- 1** Loosen, but do not remove, the 4 screws holding the cover plate. This takes 2 – 3 turns maximum. Remove the cover and gently remove the reset cable noting its position.




- 2** Remove the top (and second) row of solenoids by removing the 2 screws.
Caution - be careful not to damage the cable when removing the solenoid assembly.

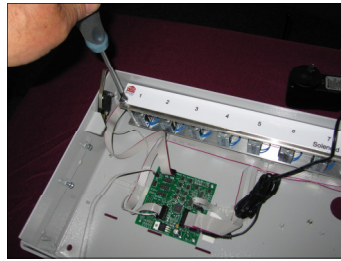


- 3** Remove the cable and put the solenoid assembly aside.

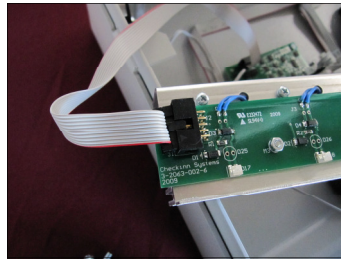


- 4** You may now position the chassis on the wall and mark the mounting hole positions. You should also mark out the cable access hole. We suggest a 10 - 12 mm hole for the cable. The chassis can be mounted using a variety of fixings to suit the wall.

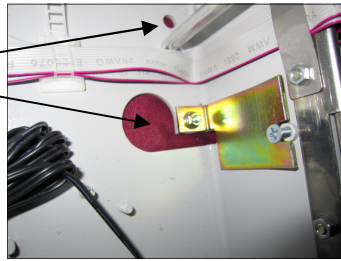


- 5** Note that there are 2 different sized power plug options. The lower connector is for a standard 2.1/5 mm plug. The top connector is for a 2.5/5mm plug. A direct to mains power supply option is also available on request.

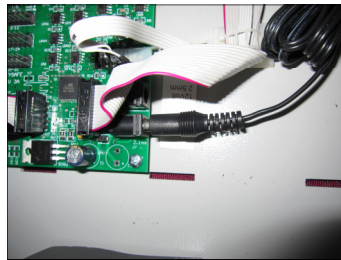

- 6** Replace the solenoid cable and carefully put the solenoid assembly back and replace the screws.

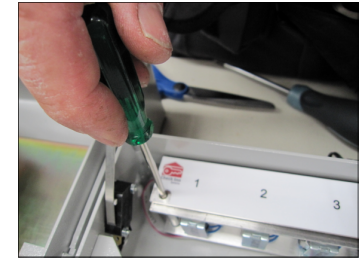

- 7** Replace the reset cable then the cover panel and tighten the screws.

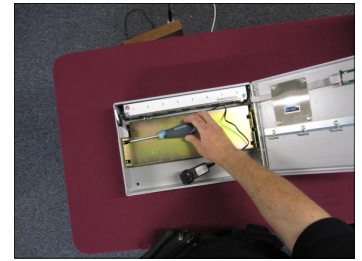

- 8** Check orientation and placement of connectors.

WARNING

If the connectors have come loose, please use the photo below to double check the locations, as damage can be caused if the connectors are not correctly replaced.

This will not be covered by warranty.

